



## EV CHARGING SOLUTION

### DC Charger / DC City Charger

#### Features

- 50kW / 100kW simultaneous charging
- Dynamic load distribution optimizes charging service
- RFID, credit card and ISO 15118 user identification
- OCPP and network connectivity enables system integration
- Modular design ensures high availability
- IP55 and small footprint provides high adaptability
- 94% power efficiency for energy-saving



Highway  
Service



Parking



Service  
Station



Commercial  
Building



Fleet




# Speed up Urban Life with EV Fast Charging


DC City Charger is an ideal solution for high efficiency urban charging service. It supports simultaneous charging output and load distribution to optimize utilization rate of the charging site. DC City Charger is compatible to OCPP which allows further backend system integration like user management, remote control and energy management.



## Feature Highlights

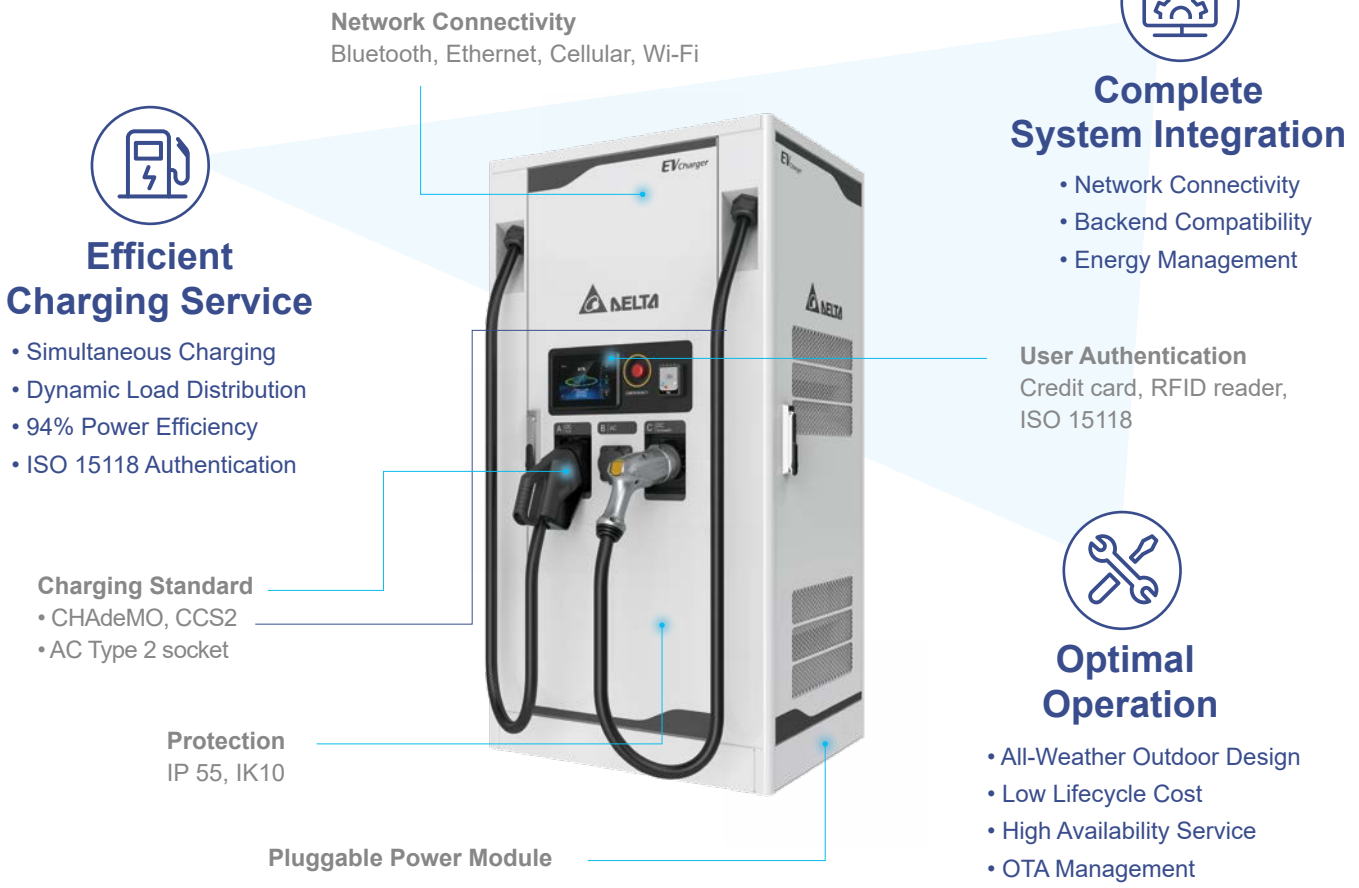

## Application Scenario

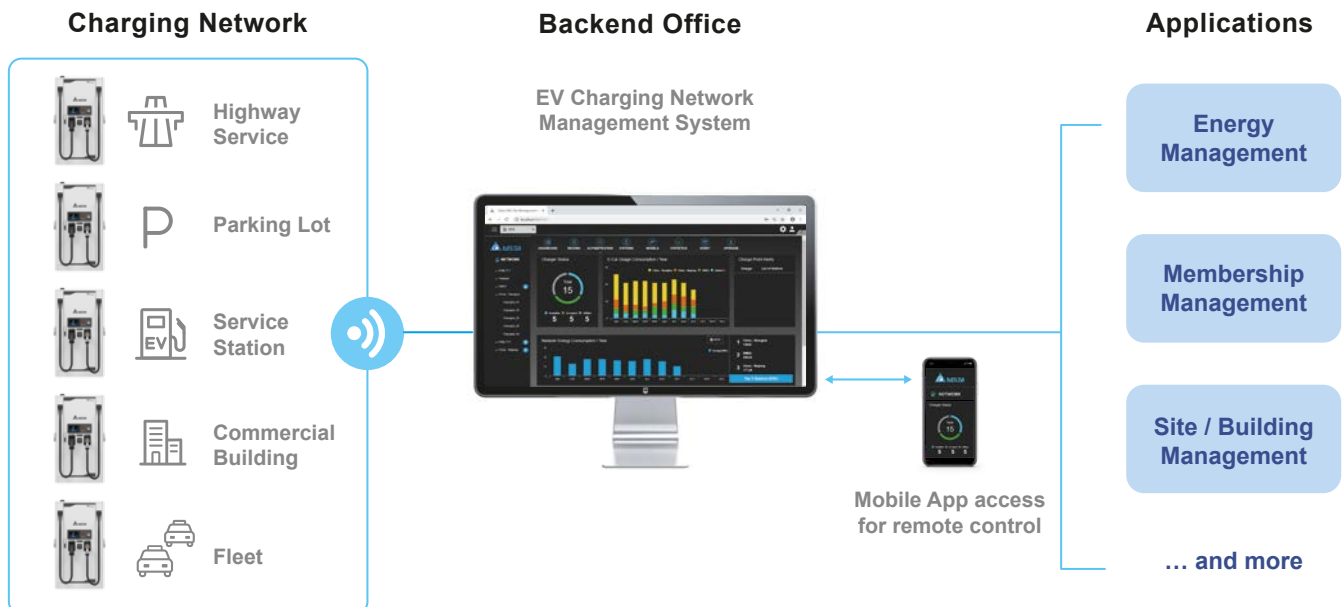

# Specifications

Part Number	EVHE104-	EVHE503-
Description	100 kW Dual Output DC Charger	50 kW Dual Output DC Charger
<b>Power Input</b>		
Input Rating	380-415 Vac, 3-Phase, 50 / 60 Hz, L1, L2, L3, N, PE	
Power Factor	0.99 at nominal output	
Efficiency	94% at nominal output power	
<b>Power Output</b>		
Output Voltage	50 – 1000 Vdc	
Output Interface	DC output options: CCS2, CHAdeMO AC output option: Type 2 Socket	
DC Output Current	200 A max.	125A max.
DC Output Power	100 kW max.	50kW max.
AC Output Current	3-Phase 32 A max.	
AC Output Power	22 kW max.	
<b>Protection</b>		
Protection	Over current, Under voltage, Over voltage, Surge protection, Short circuit, Over temperature, Ground fault	
<b>User Interface &amp; Control</b>		
Display	7 inch LCD touch panel	
Support Language	English (Other languages available upon request)	
Push Buttons	1 emergency stop button	
Charge Options	Simultaneous charging and configurable dynamic load distribution (dual outputs)	
User Authentication	ISO / IEC 14443 A / B Mifare RFID reader	
<b>Communication</b>		
Network Interface	Ethernet, Cellular, WLAN, Bluetooth	
Protocol	OCPP1.6-J, upgradable to OCPP2.0	
<b>Environmental</b>		
Operating Temperature	Operating from -30 °C to +50 °C, derating from +50 °C to +60 °C	
Storage Temperature	-40 °C to +80 °C	
Humidity	< 95% relative humidity, non-condensing	
Altitude	4,000 m	
<b>Mechanical</b>		
Ingress Protection	IP55	
Enclosure Protection	IK10 according to IEC 62262	
Cooling	Forced air	
Charging Cable Length	4 m (standard) ; 7.5 m (optional)	
Dimension (W x H x D)	800 x 1500 x 590 mm	
Weight *	350 kg	290 kg
<b>Regulation</b>		
Certificate	CE	
<b>Installation</b>		
Accessory	Cable management	

\* Dimension and weight including 4 m charging connectors, subject to variants.  
Product outlook depends on configuration. Specifications are subject to change without notice.



More information

**Delta Electronics (Netherlands) BV**

Zandsteen 15, 2132 MZ Hoofddorp,  
The Netherlands  
TEL : +31 20 655-0900

[evcharging.deltaww.com](http://evcharging.deltaww.com)

**Delta Electronics Inc.**

3 Tungyuan Road, Chungli Industrial Zone,  
Taoyuan City 32063, Taiwan  
TEL : +886 3 4526107  
E-mail : [evcs@deltaww.com](mailto:evcs@deltaww.com)

2020 / 01