

key switch replacement process


D004_v1.0




1. Turn the key to “OFF” status




2. Push the yellow part (bottom side), then release the key block part.

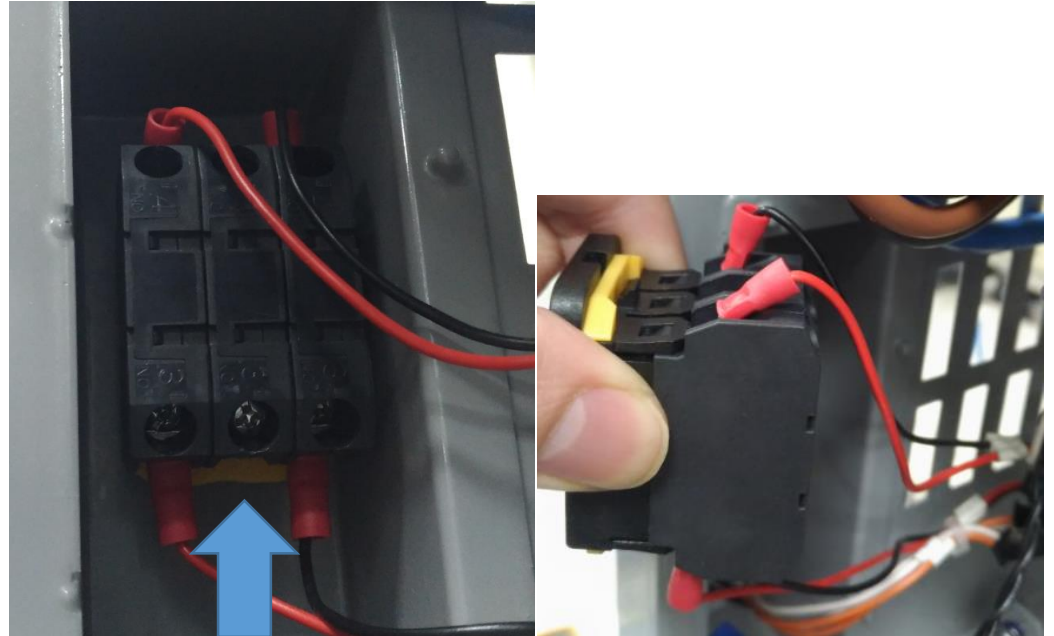

3. Cut the cable tie and release the connectors.

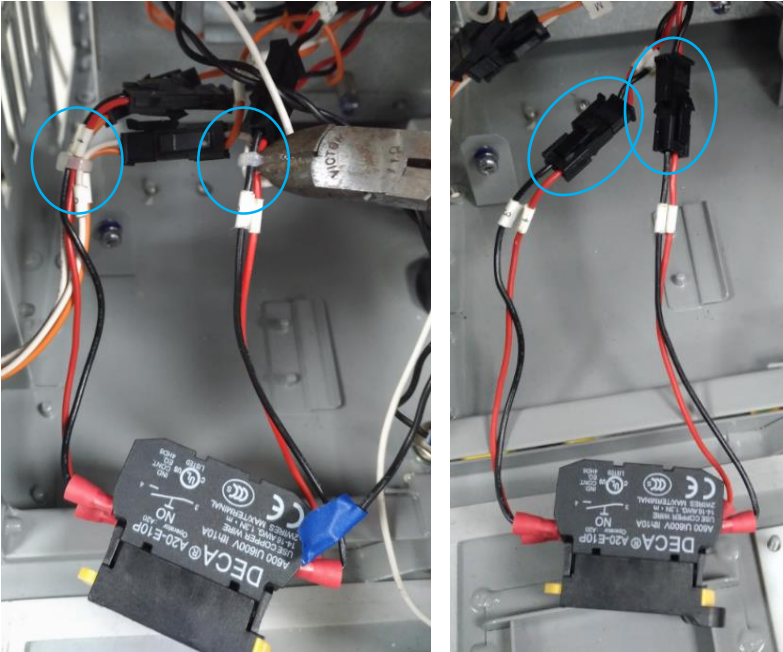

4. Use the jig to release the key switch.

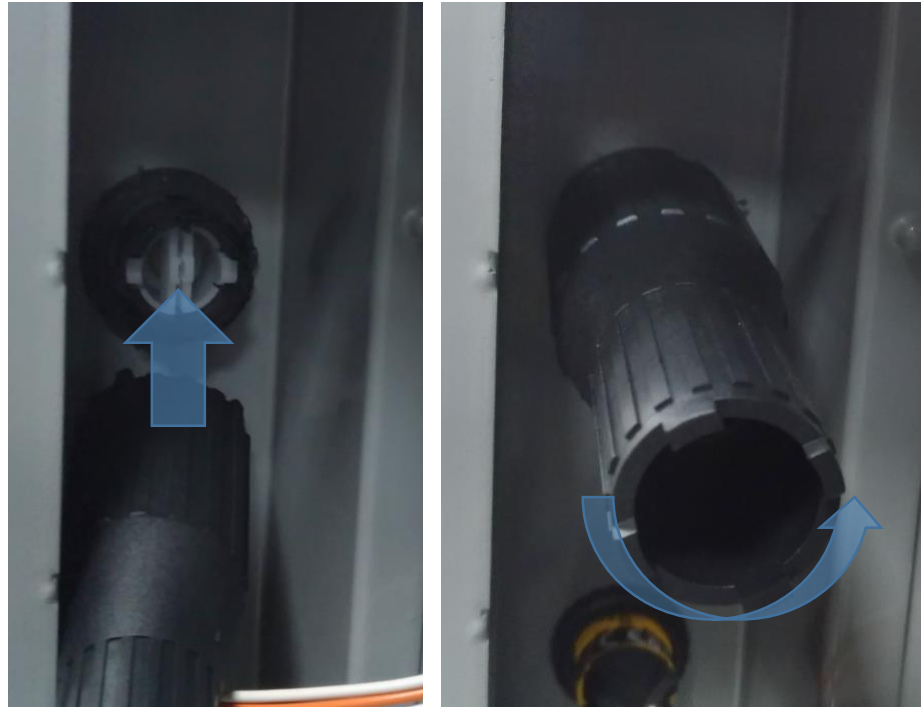

Counterclockwise to release


5. Install new key switch.




Note the key direction

Clockwise to lock



6. Use screwdriver to release the wire from old block and install to new one.

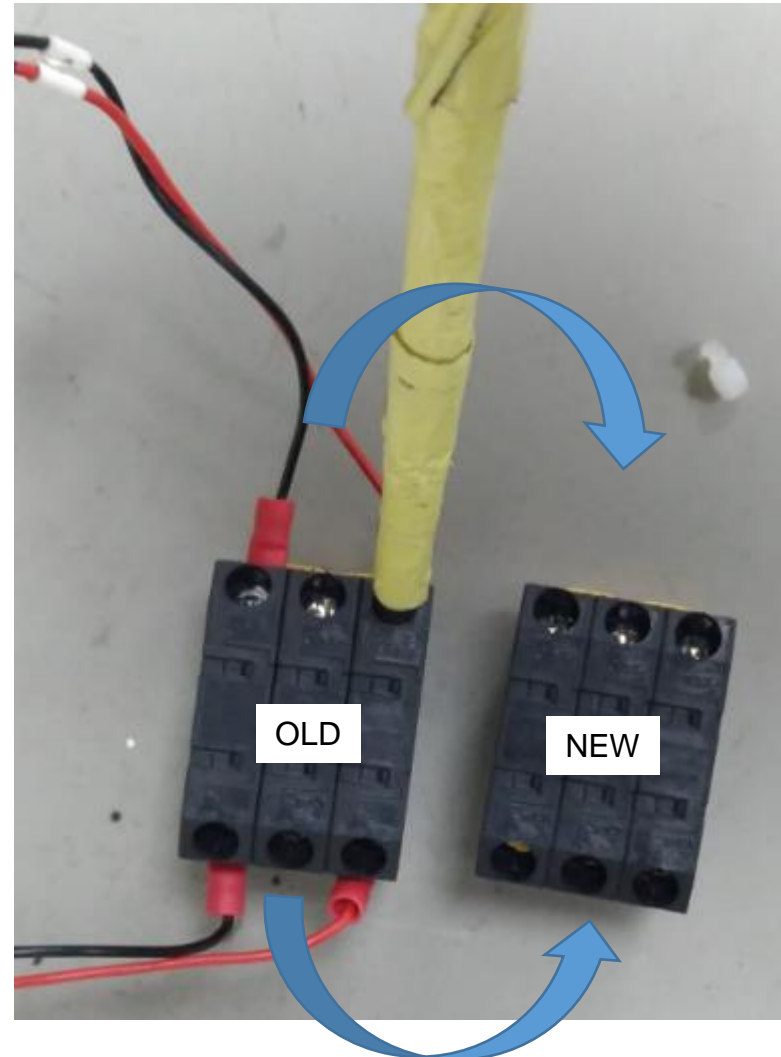

7. Install new block to key switch.

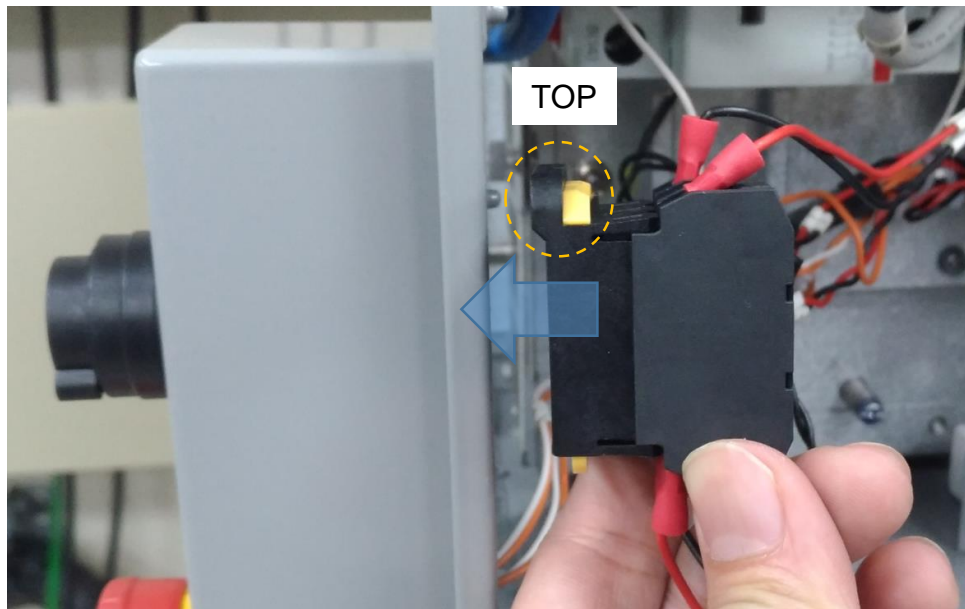

8. Install the connectors.

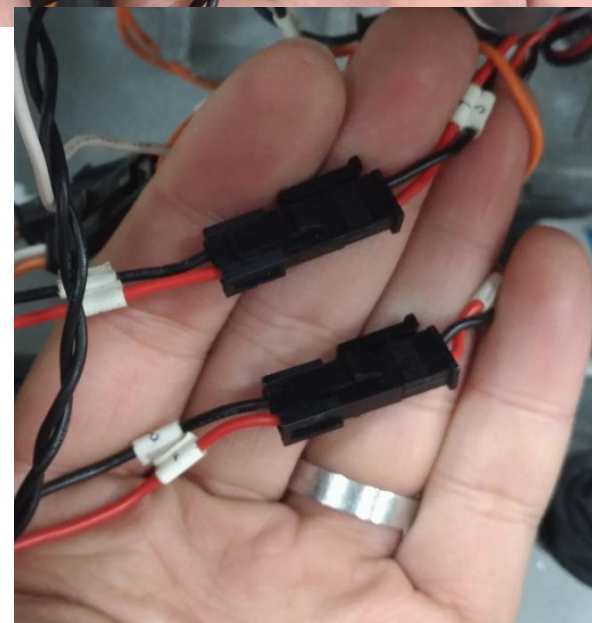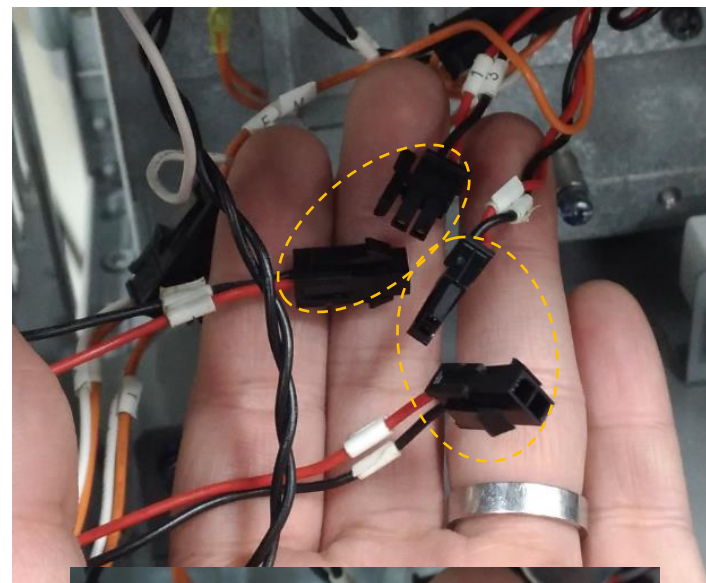

Smarter. Greener. Together.

To learn more about Delta, please visit www.deltaww.com.

