

Replace filter

DS07_v2.1





Relevance part number

- 3799997100-S (Big filter)
- 3799997200-S (Small filter)



WARNING!

To avoid danger of electrical shock or injury, turn off power at the panel board or load center before working on the equipment or removing any component. Do not remove circuit protective devices or any other component until the power is turned off.


Disconnect electrical power to the DC Wallbox before any maintenance work to ensure that it is separated from the supply of AC mains. Failure to do so may cause physical injury or damage to the electrical system and charging unit.

Remove side cover

(Take right filter for example)

Remove filter cover with T20 torx driver

- Release the two screws on top.
- Release the two screws on bottom and pull out the latch.
- Open and remove the filter cover.

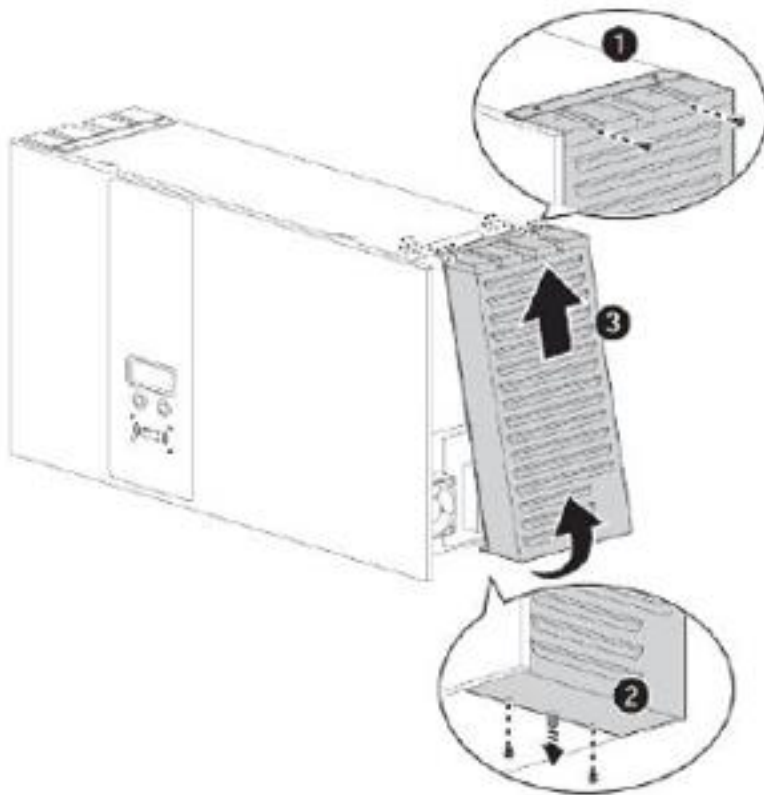

Replace the filter

Step 1:



Step 2:



Step 3:



- Step 4: Remove right side cover
- Step 5: Push blue latch to left and pull up to release filter cover
- Step 6: Take off filter and replace it, then reverse the sequence to secure right side cover.
- Step 7: Follow same process for left side cover

Smarter. Greener. Together.

To learn more about Delta, please visit www.deltaww.com.

