

DC Wallbox Replace Fan

Apr. 27, 2020

DS16_v1.0




Must turn off the Power, not only turn off the key switch but also the main breaker. To confirm that there is no power input.


Step 1. Remove the right side filter

Remove filter cover with T20 torx driver


- Release the two screws on top.
- Release the two screws on bottom and pull out the latch.
- Open and remove the filter cover.

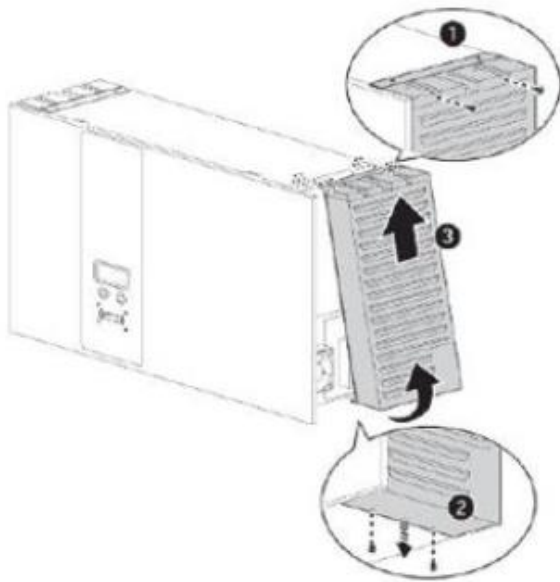



Step 2. Remove the wire which is connected on Relay Control Board

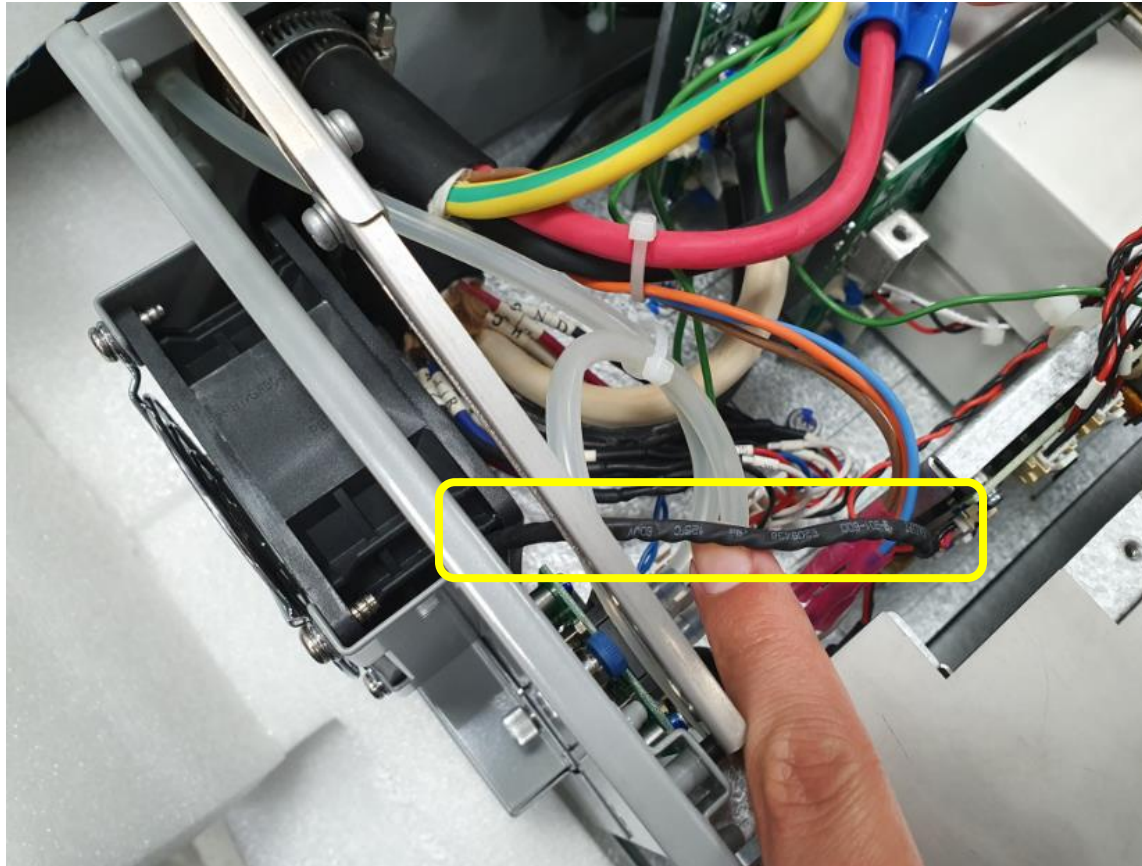



Step 3. Release the 4 screws on Fan

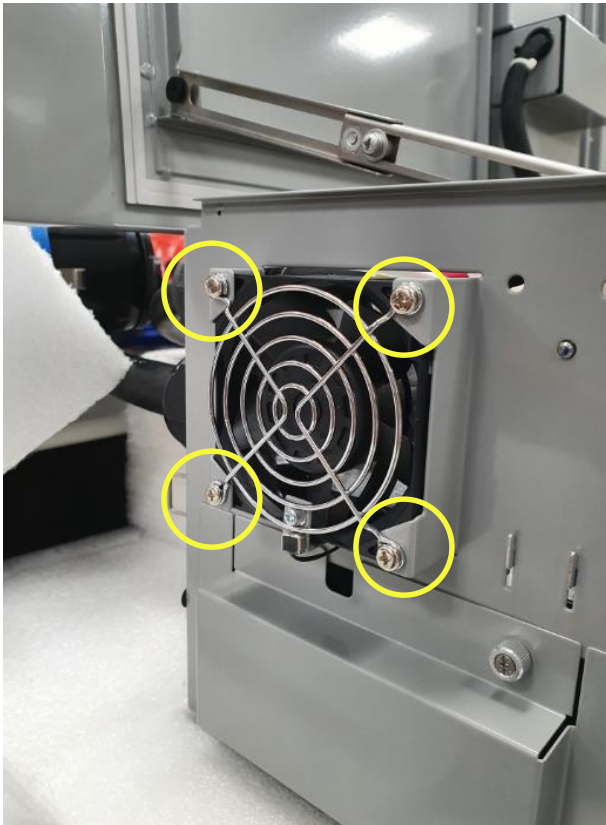

Step 4. Remove the old fan

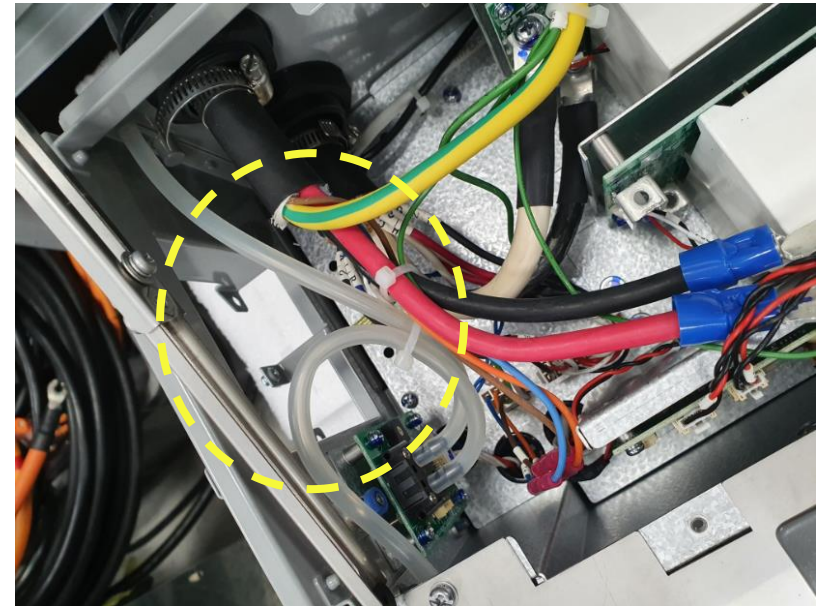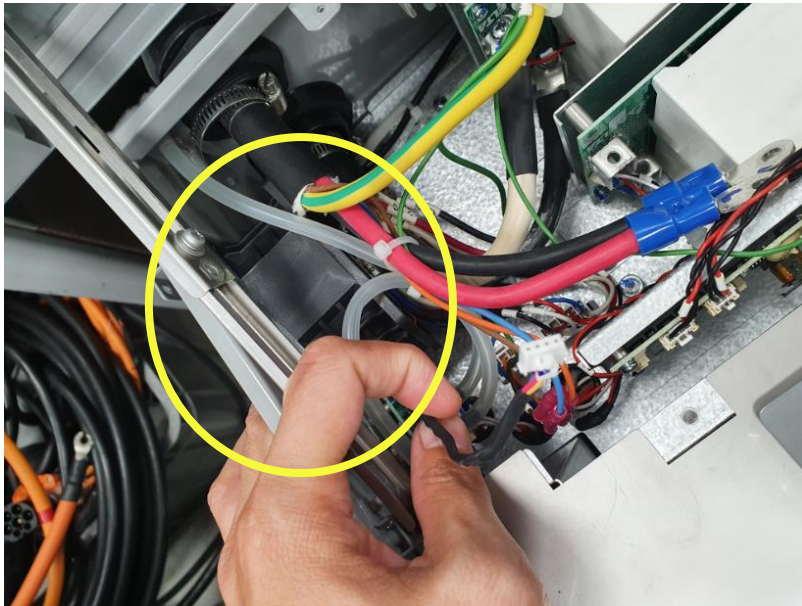

Step 5. To confirm the position, and then install the new Fan. Screw on the 4 screws and connect the wire well on Relay Control Board.

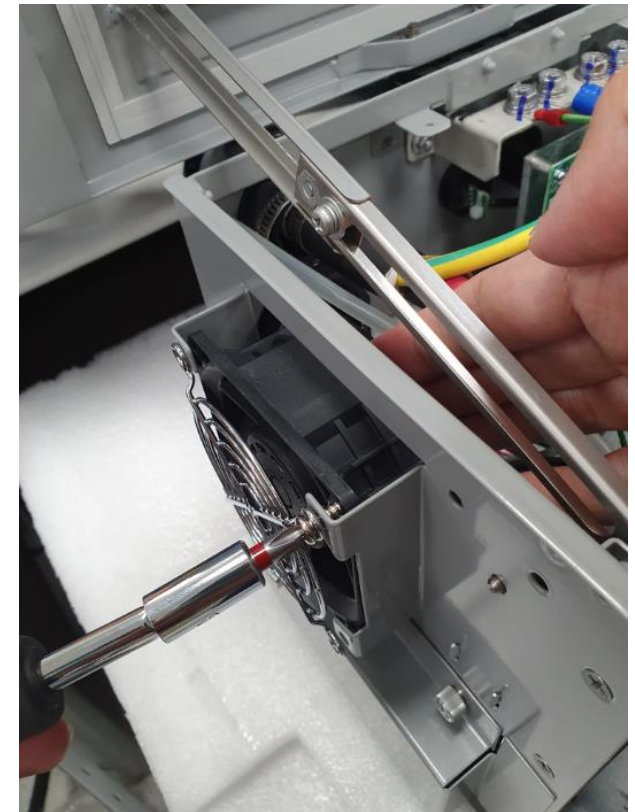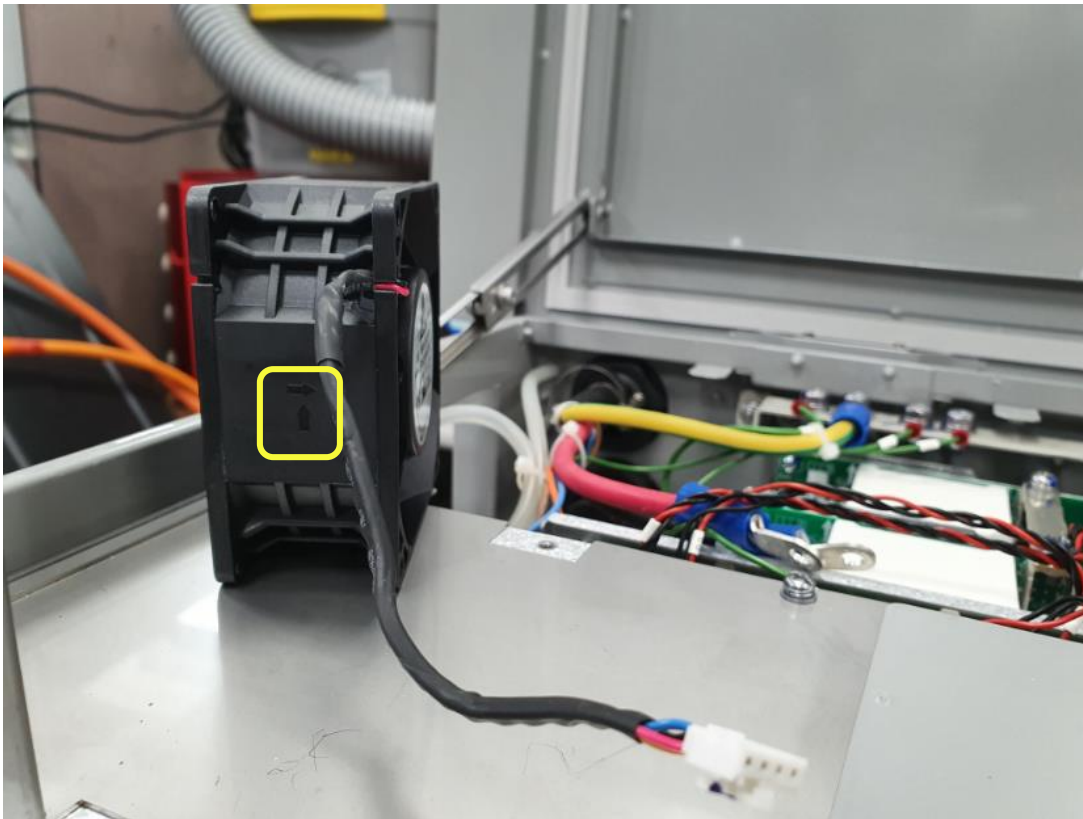

Smarter. Greener. Together.

To learn more about Delta, please visit www.deltaww.com.

